


## DS-A18-140 Panels Specifications

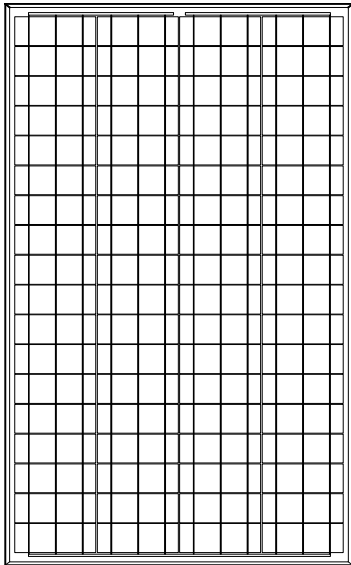

- Solar cells:** Crystalline silicon solar cells
- Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE
- Front Side:** High-transmission 3.2mm tempered glass
- Back Side:** TPT /TPE
- Frame:** Clear anodized aluminum frame
- Output:** junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A18-140	140	18.0	7.18	22.3	8.48	1400*665*35mm 55.1"*26.2"*1.38"	11.0

**Operation Temperature Range:** - 40°C ~ 85°C


**NOCT:** 48°C ± 3°C

**Temperature coefficients of Im:** + 0.1 %/°C

**Temperature coefficients of Vm:** - 0.38 %/°C

**Maximum System Voltage:** DC600V

**STC:** 1000W/m<sup>2</sup>, 25°C, AM1.5

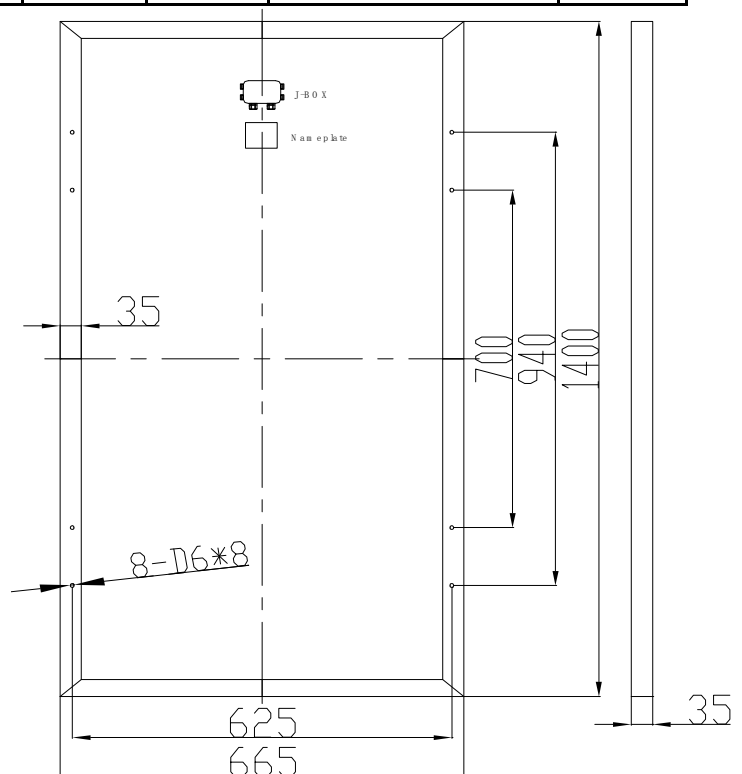

All the data of this sheet are subjected to change without notice.