


## DS-A18-5 Panels Specifications

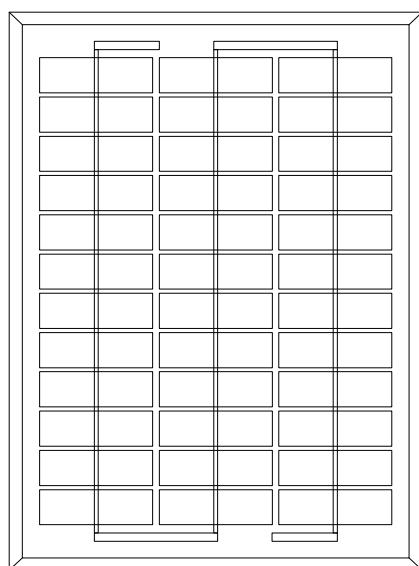

**Solar cells:** pieces crystalline solar cells

**Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

**Front Side:** High-transmission 3.2mm tempered glass

**Back Side:** TPT /TPE

**Frame:** Clear anodized aluminum frame

**Output cable:** Multicontact connectors

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A18-5	5	18.0	0.28	22.3	0.3	270*190*18mm 10.6"*7.5"*0.7"	0.7

**Operation Temperature Range:** - 40°C ~ 85°C


**NOCT:** 48°C ± 3°C

**Temperature coefficients of Im:** + 0.1 %/°C

**Temperature coefficients of Vm:** - 0.38 %/°C

**Maximum System Voltage:** DC715V

**STC:** 1000W/m<sup>2</sup>, 25°C, AM1.5

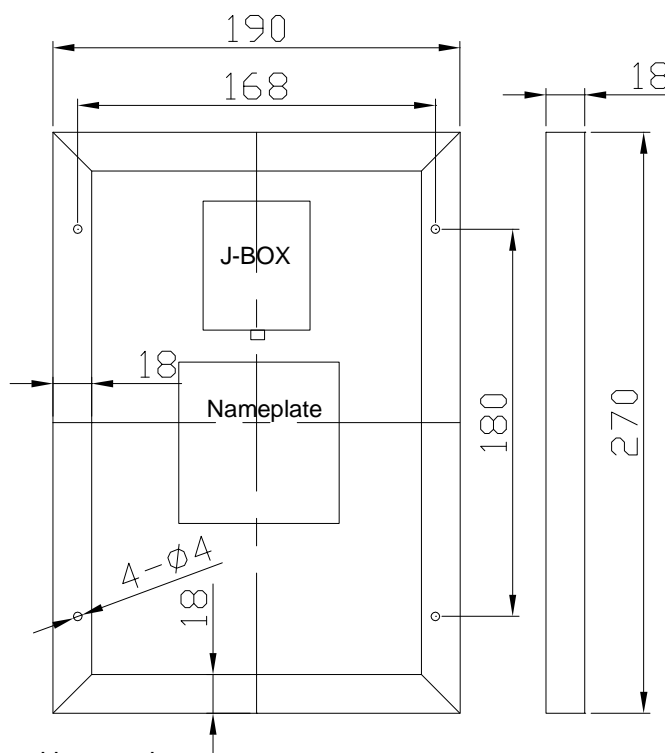

All the data of this sheet are subjected to change without notice.