


DS-A36-130 Panels Specifications

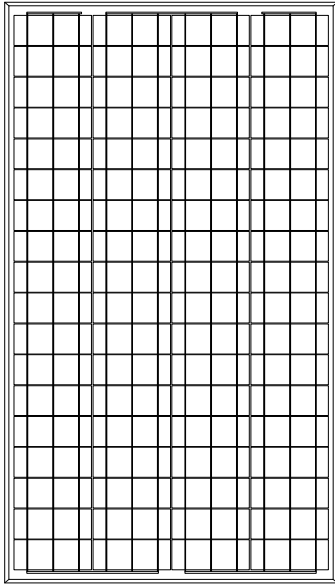

- Solar cells:** Crystalline silicon solar cells
- Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE
- Front Side:** High-transmission 3.2mm tempered glass
- Back Side:** TPT /TPE
- Frame:** Clear anodized aluminum frame
- Output:** junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A36-130	130	36.0	3.61	44.6	3.94	1310*665*35mm 51.6"*26.2"*1.38"	10.3

Operation Temperature Range: - 40°C ~ 85°C


NOCT: 48°C ± 3°C

Temperature coefficients of Im: + 0.1 %/°C

Temperature coefficients of Vm: - 0.38 %/°C

Maximum System Voltage: DC600V

STC: 1000W/m², 25°C, AM1.5

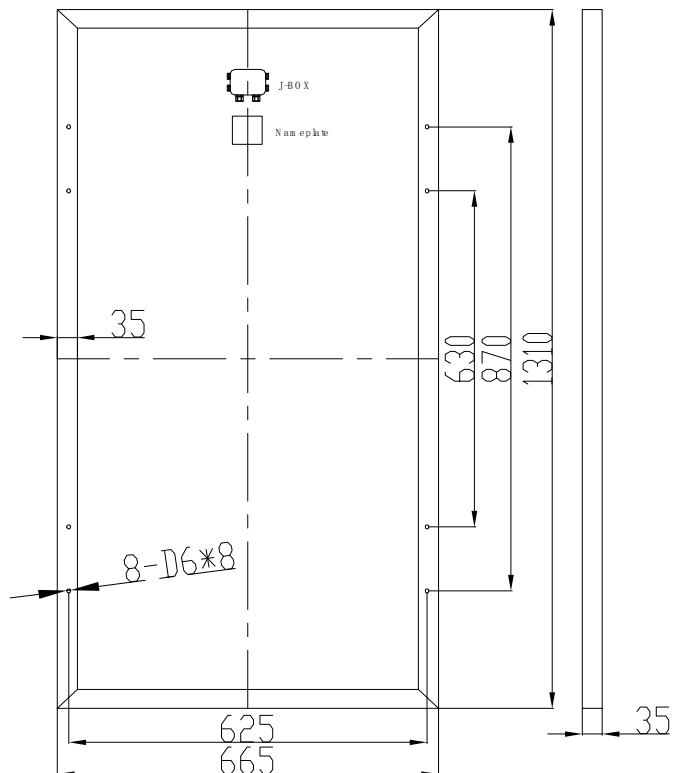

All the data of this sheet are subjected to change without notice.