


DS-A36-60 Panels Specifications

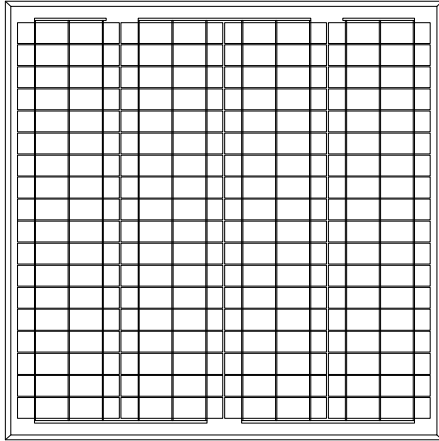

Solar cells: Crystalline silicon solar cells

Laminate: Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

Front Side: High-transmission 3.2mm tempered glass

Back Side: TPT /TPE

Frame: Clear anodized aluminum frame

Output: junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A36-60	60	36.0	1.67	44.6	1.82	650*665*35mm 25.6*26.2"*1.38"	5.3

Operation Temperature Range: - 40°C ~ 85°C


NOCT: 48°C ± 3°C

Temperature coefficients of Im: + 0.1 %/°C

Temperature coefficients of Vm: - 0.38 %/°C

Maximum System Voltage: DC600V

STC: 1000W/m², 25°C, AM1.5

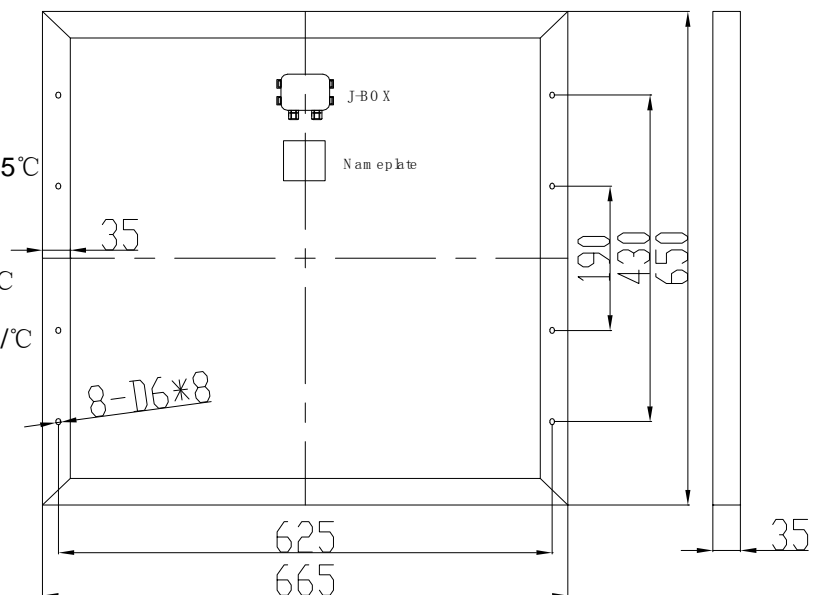

All the data of this sheet are subjected to change without notice.

Anji DaSol Solar Energy Science & Technology Co., Ltd.